

GW600 PRO

Glassworker & Vacuum cups



- Max. load capacity 600 kg
- Additional manual extension (610 mm)
- Fully hydraulic extension
- Vertical mounting up to 3.60 m
- Overhead mounting up to 4.20 m
- Sensitive hydraulics
- Sensitive radio remote control with LCD display, charger, second battery and accessories
- Visual display of all queries in the radio remote control
- Self-monitoring safety system
- Plug & Play delivery
- Overload key
- Hydraulic side shift in the vacuum cross (+/- 50 mm)
- Automatic angle correction
- Hydraulic turning
- Hydraulic swivel
- Front drive 3 kW



Uplifter GmbH & Co.KG


Oberaich 5 | 92543 Guteneck
Germany
T +49 9433 204990
www.uplifter.com



Use the Uplifter PRO principle

Two devices in one machine. The innovation on the market, a glassworker with a removable and independently usable vacuum cross. Remain as individual as your requirements on the construction site.

- **Removable vacuum cup UPG600**
- Load capacity: 4 suction cups = 300 kg, 6 suction cups = 450 kg and 8 suction cups = 600 kg
- Silicone-free suction pads (no marks)
- Remote control and push-button operation
- Suction plates with spring-loaded plunger and joint
- Removable support arm, device depth min. 139 mm
- Two independent vacuum circuits with 2-fold safety
- Individual suction cup arrangement without tools
- Mains-independent 12 V battery power supply
- Extension arms for large-area elements
- Meets the requirements of DIN EN 13155
- Permissible temperature range 0° to 40°
- Operating instructions with CE declaration of conformity
- Total weight of glassworker + vacuum suction cup approx. 1,035 - 1,095 kg

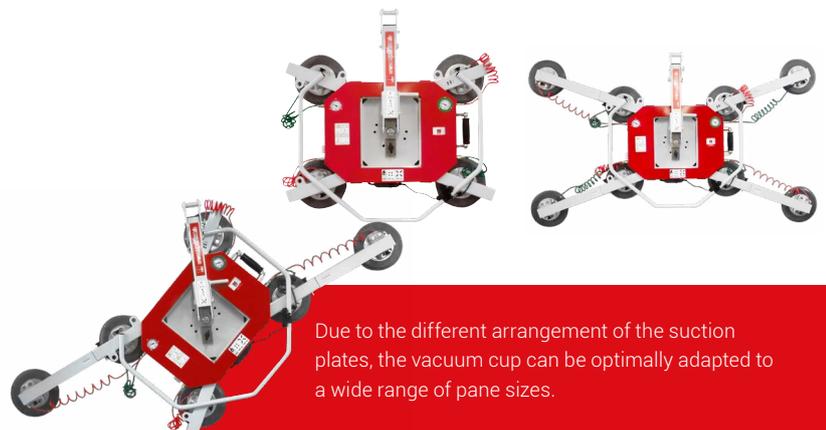

Due to the different arrangement of the suction plates, the vacuum cup can be optimally adapted to a wide range of pane sizes.

GW600 PRO

Glassworker & Vacuum cups



| | |
|---------------------|--|
| Load capacity | 625 kg |
| Working height max. | 3,64 m Center vacuum cross |
| Indoor suitable | |
| Outdoor suitable | |
| Highlifter | optional |
| Scope forward* | 1,49 - 2,10 m |
| Dead weight* | 1.035 - 1.095 kg |
| Length | 2,46 m |
| Wide | 0,84 m |
| Operating time | up to 8 hours |
| Accessories | white non-marking solid tires, black solid tires (PUR), double tires for all types of tires, load hook, crane tip, forklift fork, additional horizontal tilting (HK+), cover hood, LED working light, adapter for curved discs, mount extensions for curved discs, foam rubber suction pad and winch |

* depending on equipment



You can find interesting videos with **visualisation** on **YouTube**.
 Subscribe to our channel to find out more about the possibilities of our machines. From **instruction videos** to construction site use, everything is included.

